


HYDRAULIC PLANETARY WINCHES

Series 15

15,000 lbs Capacity

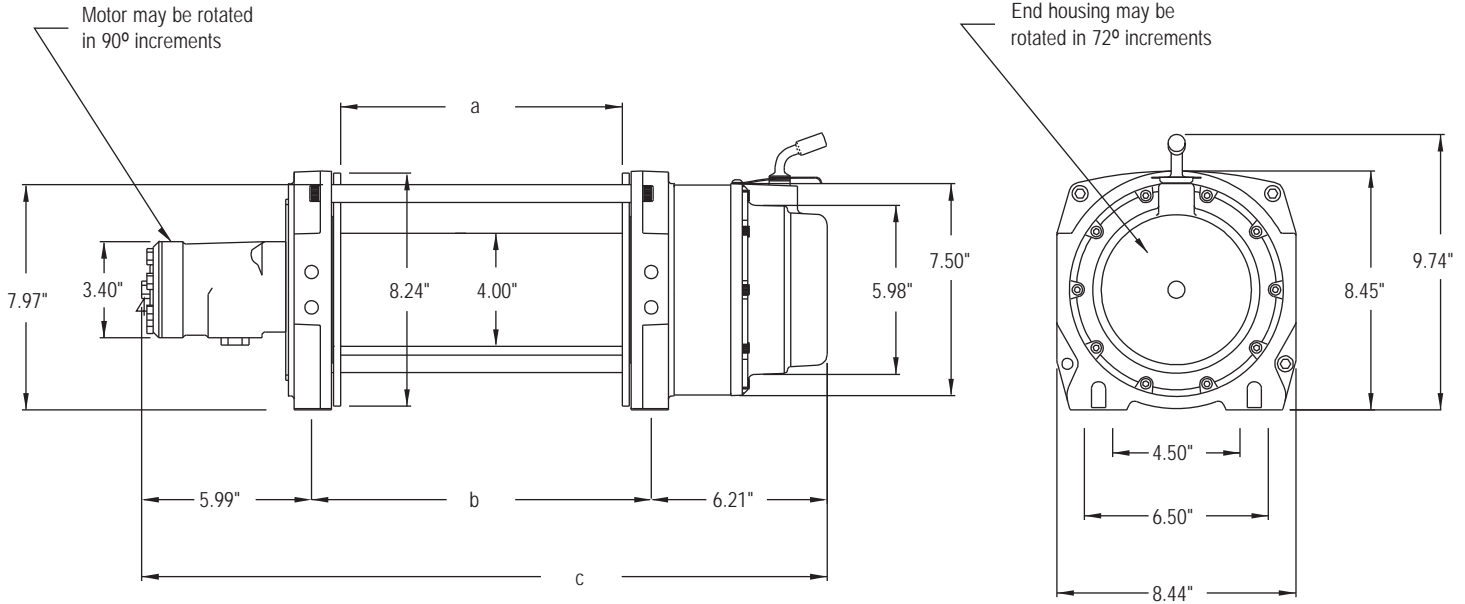

FEATURES

- Freespooling Drum
- 2-Stage Planetary Reduction
- Automatic Disc Brake
- Locking Clutch Lever
- Simple Wire Rope Attachment
- Rated for Winching on Slopes up to 30%

Drum Size	Dimensions			Shipping Weight	Wire Rope Capacity		
	a	b	c		1/4"	5/16"	3/8"
-01	8.0"	10.0"	22.2"	82 lbs	326'	228'	159'
-02	10.0"	12.0"	24.2"	85 lbs	407'	285'	198'
-03	12.5"	14.5"	26.7"	92 lbs	509'	356'	248'

PERFORMANCE

Specifications			Multi-Layer Performance			First Layer Performance	
Motor	Flow / PSI	Gear Ratio	Layer	Load (lbs)	Speed (fpm)	Load (lbs)	PSI
5.9 cu in	16 GPM 1850 PSI	36:1	1	15,000	20.0	0	300
			2	12,675	23.0	4000	655
			3	11050	26.0	12,000	1480
			4	9813	29.0	15,000	1850

Performance based on intermittent duty cycles.

CAUTION: The final determination as to the suitability of this product for any purpose is solely that of the user. These products are not to be used to lift people or to lift anything over people.

ALLIED POWER PRODUCTS, INC.

THE WINCH & HOIST SPECIALISTS

6590 SW Fallbrook Place, Beaverton, OR 97008

(503) 626-0654 Fax (503) 646-1996

www.alliedpower.com